

## Verbatim LED Tube T8 G13 1200mm 22W 1950lm 4000K

- G13 Socket
- 220-240V
- 40,000 hours Lifetime
- Luminous Flux: 1950 lm



Product Number	52701
<b>General Data</b>	
Lamp Socket	G13
Design	LED T8 Tube
<b>Electric Data</b>	
Wattage (W)	22
Voltage (V)	220-240
Dimmable	no
Power Factor	0.90
Operating Frequency (Hz)	50-60
<b>Geometric Data</b>	
Length (mm)	1213
Diameter (in mm)	28 x 32
Weight (g)	350
<b>Photometric Data</b>	
Luminous Flux (lm)	1950
CRI	80
CCT (K)	4000
Beam Angle (°)	120
Luminous Efficacy (lm/W)	88.64
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-35 - 45°C




04/08/2014

## Lifestyle image




## Technical Drawings

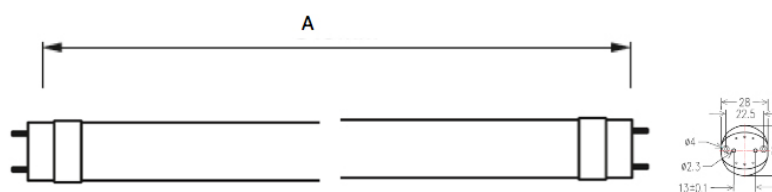


04/08/2014

Photometric Diagrams

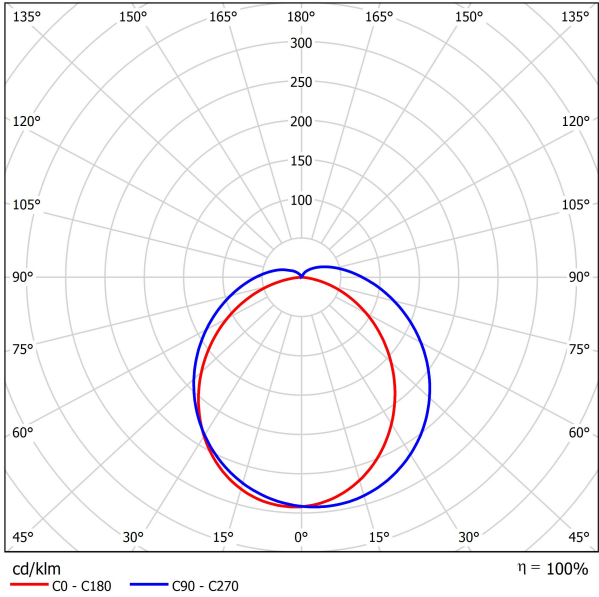

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	1.39 1.15	E(0°) 2270 E(C90) 54.2° 227 E(C0) 49.0° 321
1.0	2.77 2.30	E(0°) 568 E(C90) 54.2° 57 E(C0) 49.0° 80
1.5	4.16 3.45	E(0°) 252 E(C90) 54.2° 25 E(C0) 49.0° 36
2.0	5.55 4.60	E(0°) 142 E(C90) 54.2° 14 E(C0) 49.0° 20
2.5	6.93 5.75	E(0°) 91 E(C90) 54.2° 9 E(C0) 49.0° 13
3.0	8.32 6.90	E(0°) 63 E(C90) 54.2° 6 E(C0) 49.0° 9

Energy Rating

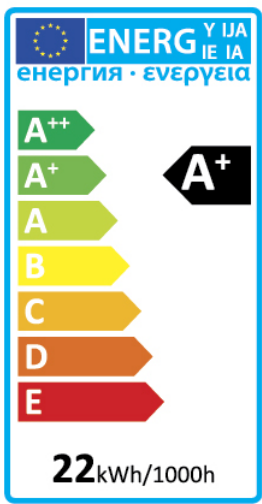

Technical Packaging Details

<b>Barcode</b> 023942527015
<b>EAN 128</b> (02)00023942527015(37)04(91)803
<b>EAN 14</b> 50023940527010
<b>Pack Dimensions(HxWxL)</b> 35 x 33 x 1295 (mm)
<b>Pack Weight</b> 480 (g)
<b>MOQ</b> 10
<b>Carton Dimensions (HxWxL)</b> 90 x 180 x 1325 (mm)
<b>Cartons/Pallet</b> 36
<b>Layers/Pallet</b> 9
<b>Units/Pallet</b> 360

04/08/2014